


Toroidal transformer type Z80xx

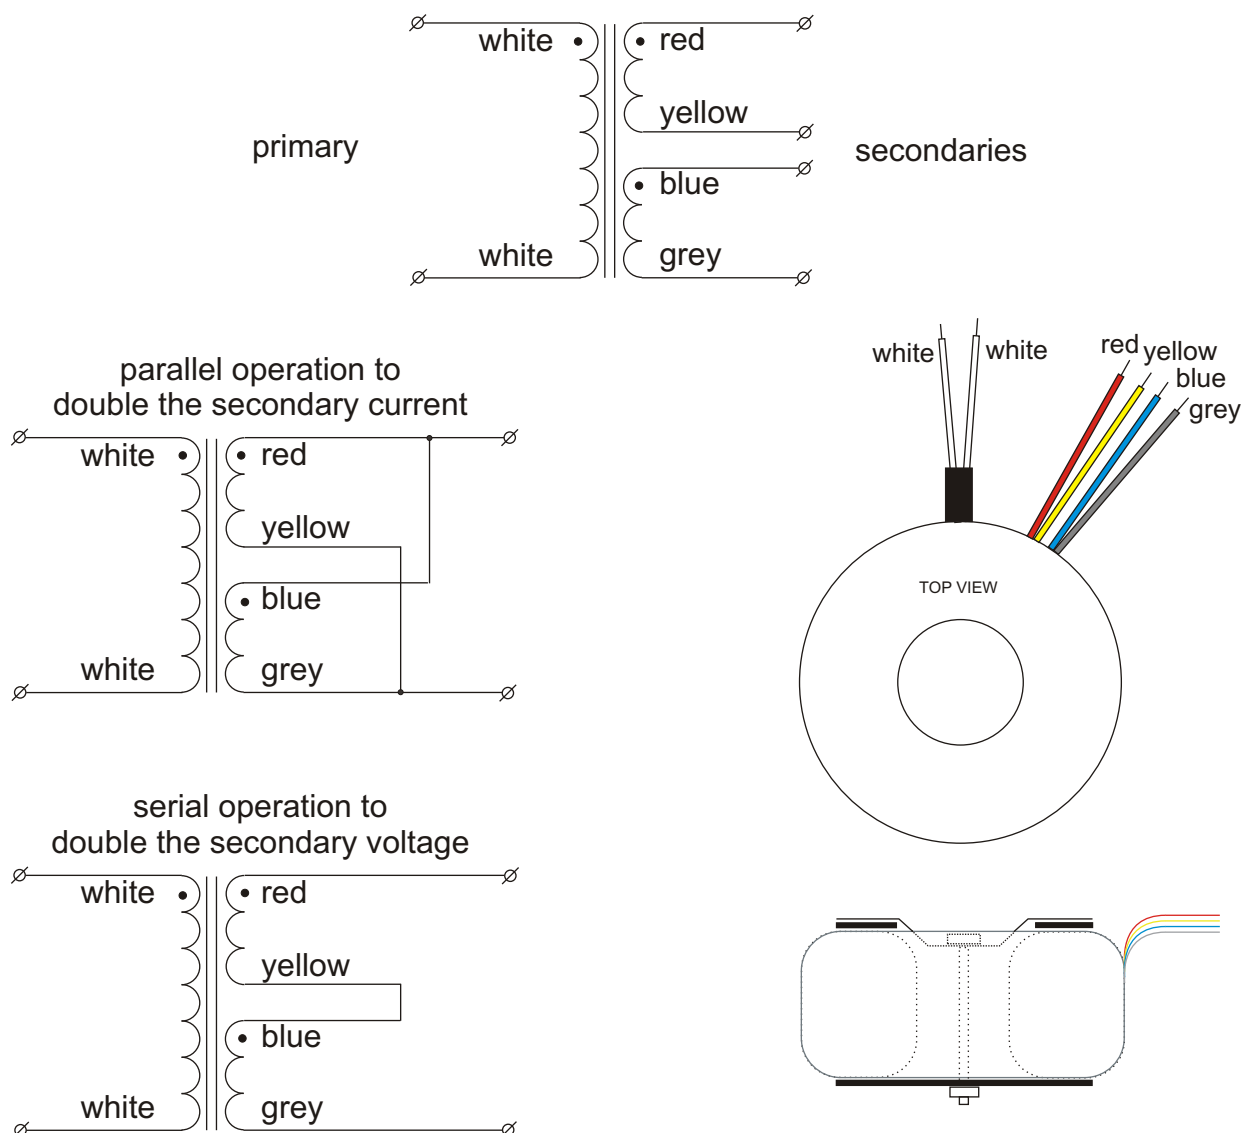

Diameter 160mm
Height 72mm
Weight 7.5kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø110mm
2 neoprene washers Ø110mm
1 bolt M8x90mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
Primary: 5A, 5x20mm, IEC127, high I²t value
(additional inrush-current protection is necessary)
Secondary: none

Type number	primary	secondaries	
		voltage	current
Z8015	230V	2x 22V	22.7A
Z8016	230V	2x 25V	20.0A
Z8017	230V	2x 30V	16.7A
Z8018	230V	2x 35V	14.3A
Z8026	230V	2x 40V	12.5A
Z8022	230V	2x 42V	11.9A
Z8025	230V	2x 45V	11.1A
Z8033	230V	2x 50V	10.0A
Z8042	230V	2x 55V	9.09A
Z8044	230V	2x 60V	8.33A
Z8070	230V	2x 115V	4.35A

All voltages are under full ohmic load.
Regulation : 3.5%



Vossenbrinkweg 1
NL-7491DA DELDEN
The Netherlands

P O - B o x 2 4
NL-7490AA DELDEN
The Netherlands
Tel.+31 (0)74 376 3765
Fax+31 (0)74 376 3132

info@amplimo.nl
http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

Z80xx

**toroidal transformer
range 1000VA**