


Toroidal transformer type 480xx

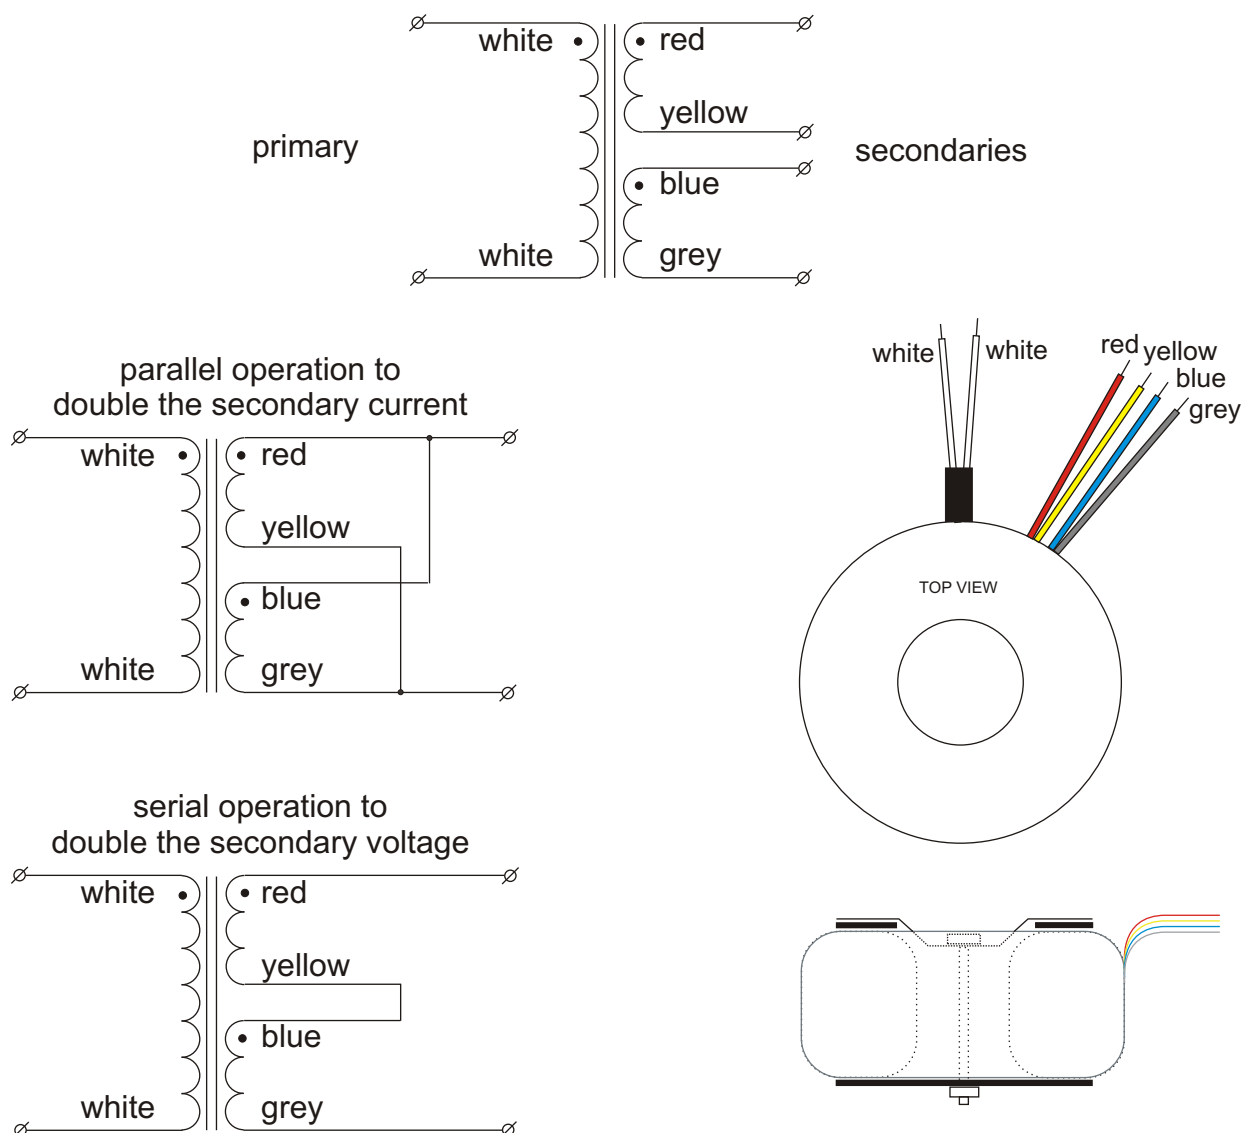

Diameter 91mm

Height 49mm

Weight 1.4kg

Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:

1 metal washer Ø70mm

2 neoprene washers Ø70mm

1 bolt M5x55mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.

Primary: 0.63A, 5x20mm, IEC127, high I²t value

Secondary: none

Type number	primary	secondaries	
		voltage	current
48010	230V	2x 6V	10.0A
48011	230V	2x 9V	6.66A
48012	230V	2x 12V	5.00A
48013	230V	2x 15V	4.00A
48014	230V	2x 18V	3.33A
48027	230V	2x 20V	3.00A
48015	230V	2x 22V	2.72A
48016	230V	2x 25V	2.40A
48017	230V	2x 30V	2.00A
48018	230V	2x 35V	1.71A
48070	230V	2x 115V	0.52A

All voltages are under full ohmic load.
Regulation : 8%



Vossenbrinkweg 1
NL-7491DA DELDEN
The Netherlands

P O - B o x 2 4
NL-7490AA DELDEN
The Netherlands
Tel.+31 (0)74 376 3765
Fax+31 (0)74 376 3132

info@amplimo.nl
http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

480xx

**toroidal transformer
range 120VA**