


Toroidal transformer type 580xx

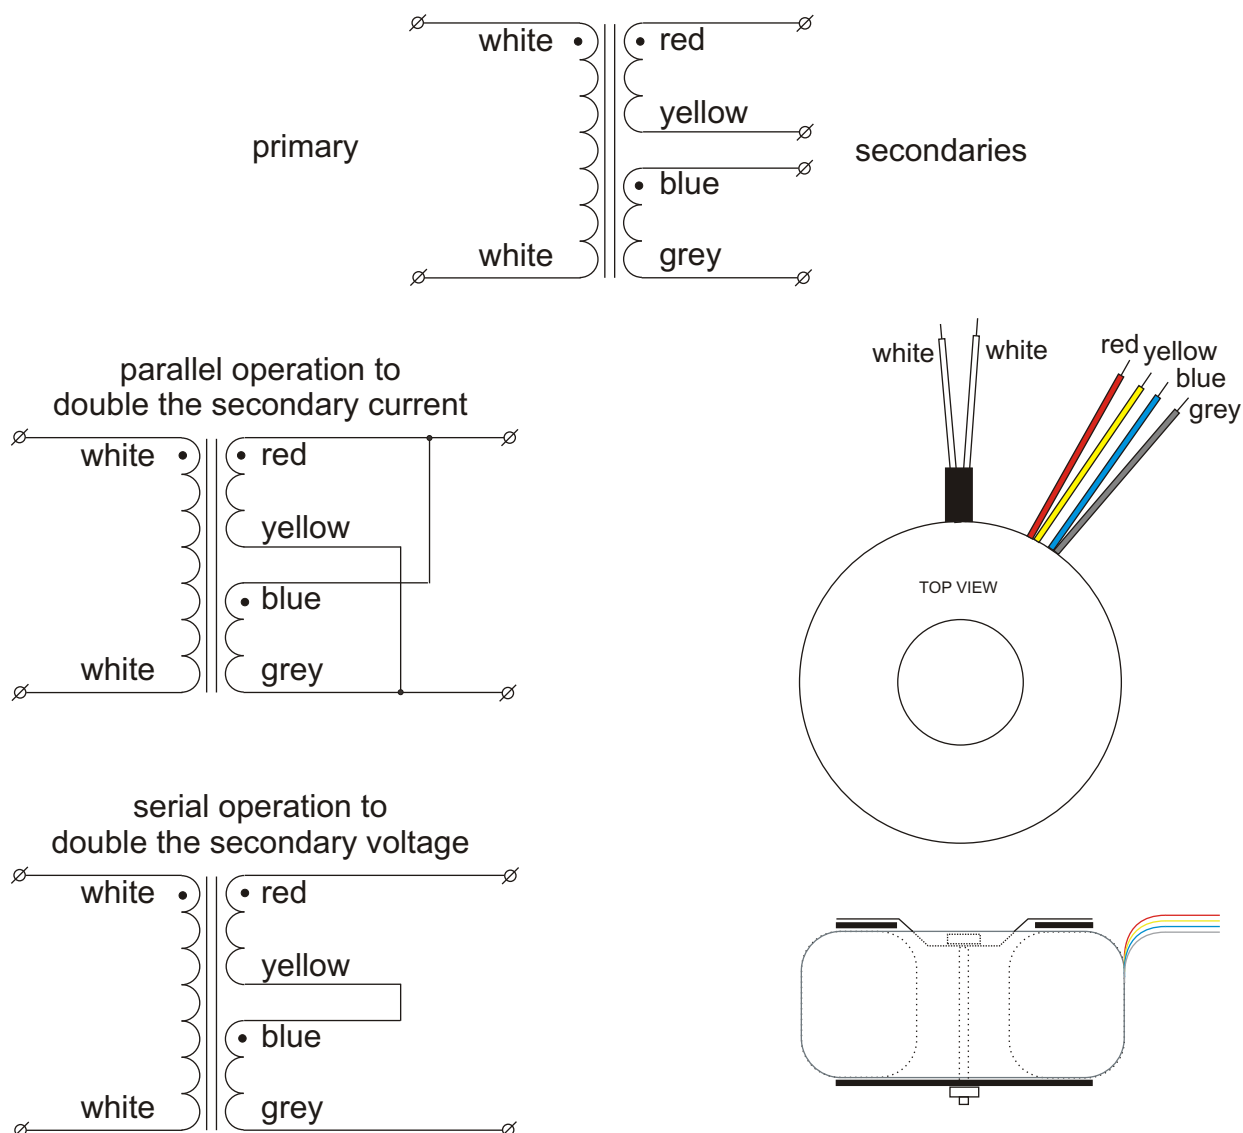

Diameter 110mm
Height 43mm
Weight 1.9kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø90mm
2 neoprene washers Ø90mm
1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
Primary: 0.8A, 5x20mm, IEC127, high I²t value
Secondary: none

Type number	primary	secondaries	
		voltage	current
58010	230V	2x 6V	13.3A
58011	230V	2x 9V	8.89A
58012	230V	2x 12V	6.67A
58013	230V	2x 15V	5.33A
58014	230V	2x 18V	4.44A
58015	230V	2x 22V	3.63A
58016	230V	2x 25V	3.20A
58017	230V	2x 30V	2.67A
58019	230V	2x 33V	2.42A
58018	230V	2x 35V	2.28A
58026	230V	2x 40V	2.00A

All voltages are under full ohmic load.
Regulation : 7%



Vossenbrinkweg 1
NL-7491DA DELDEN
The Netherlands

P O - B o x 2 4
NL-7490AA DELDEN
The Netherlands
Tel.+31 (0)74 376 3765
Fax+31 (0)74 376 3132

info@amplimo.nl
<http://www.amplimo.nl>

HB

April 2003

© Copyright Amplimo BV

580xx

**toroidal transformer
range 160VA**