
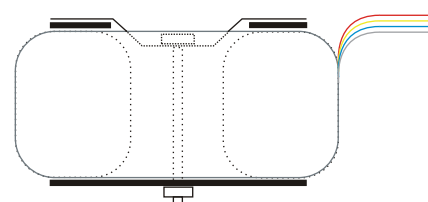
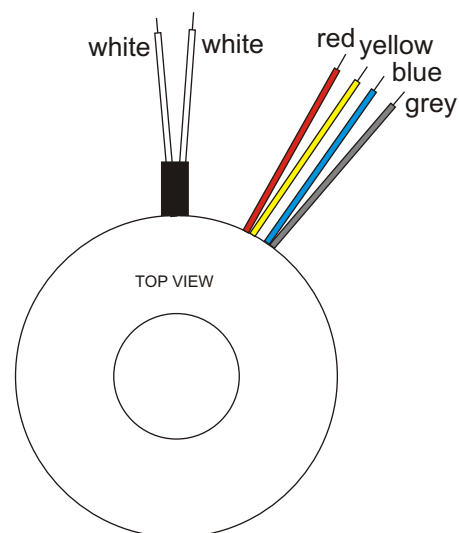
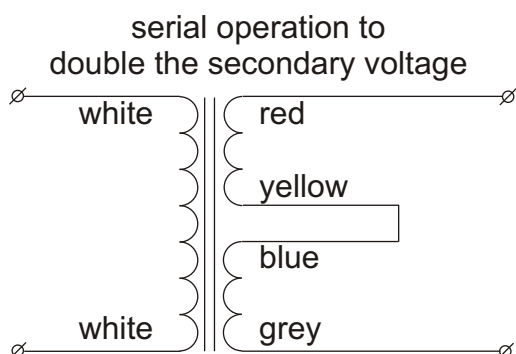
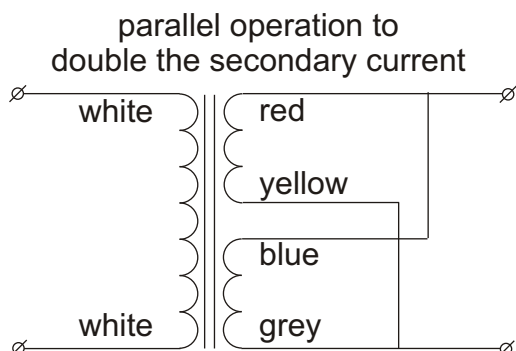


Toroidal transformer type 180xx

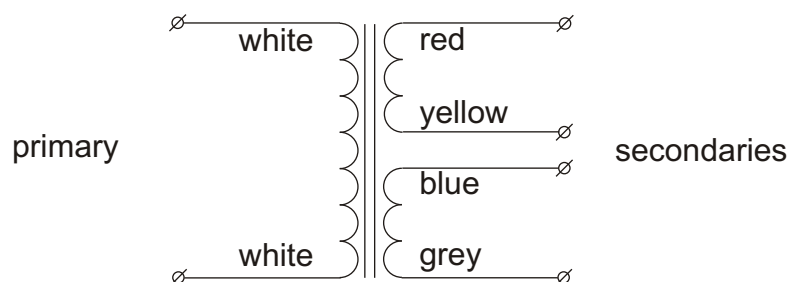

Diameter 70mm
Height 32mm
Weight 0.44kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø50mm
2 neoprene washers Ø50mm
1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.
Primary: 0.16A, 5x20mm, IEC127, high I²t value
Secondary: none

Type number	primary	secondaries	
		voltage	current
18010	230V	2x 6V	2.50A
18011	230V	2x 9V	1.66A
18012	230V	2x 12V	1.25A
18013	230V	2x 15V	1.00A
18014	230V	2x 18V	0.83A
18015	230V	2x 22V	0.68A
18016	230V	2x 25V	0.60A
18017	230V	2x 30V	0.50A

All voltages are under full ohmic load.
Regulation : 17%



Vossenbrinkweg 1
NL-7491DA DELDEN
The Netherlands

P O - B o x 2 4
NL-7490AA DELDEN
The Netherlands
Tel.+31 (0)74 376 3765
Fax+31 (0)74 376 3132

info@amplimo.nl
http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

180xx

**toroidal transformer
range 30VA**