


Toroidal transformer type 380xx

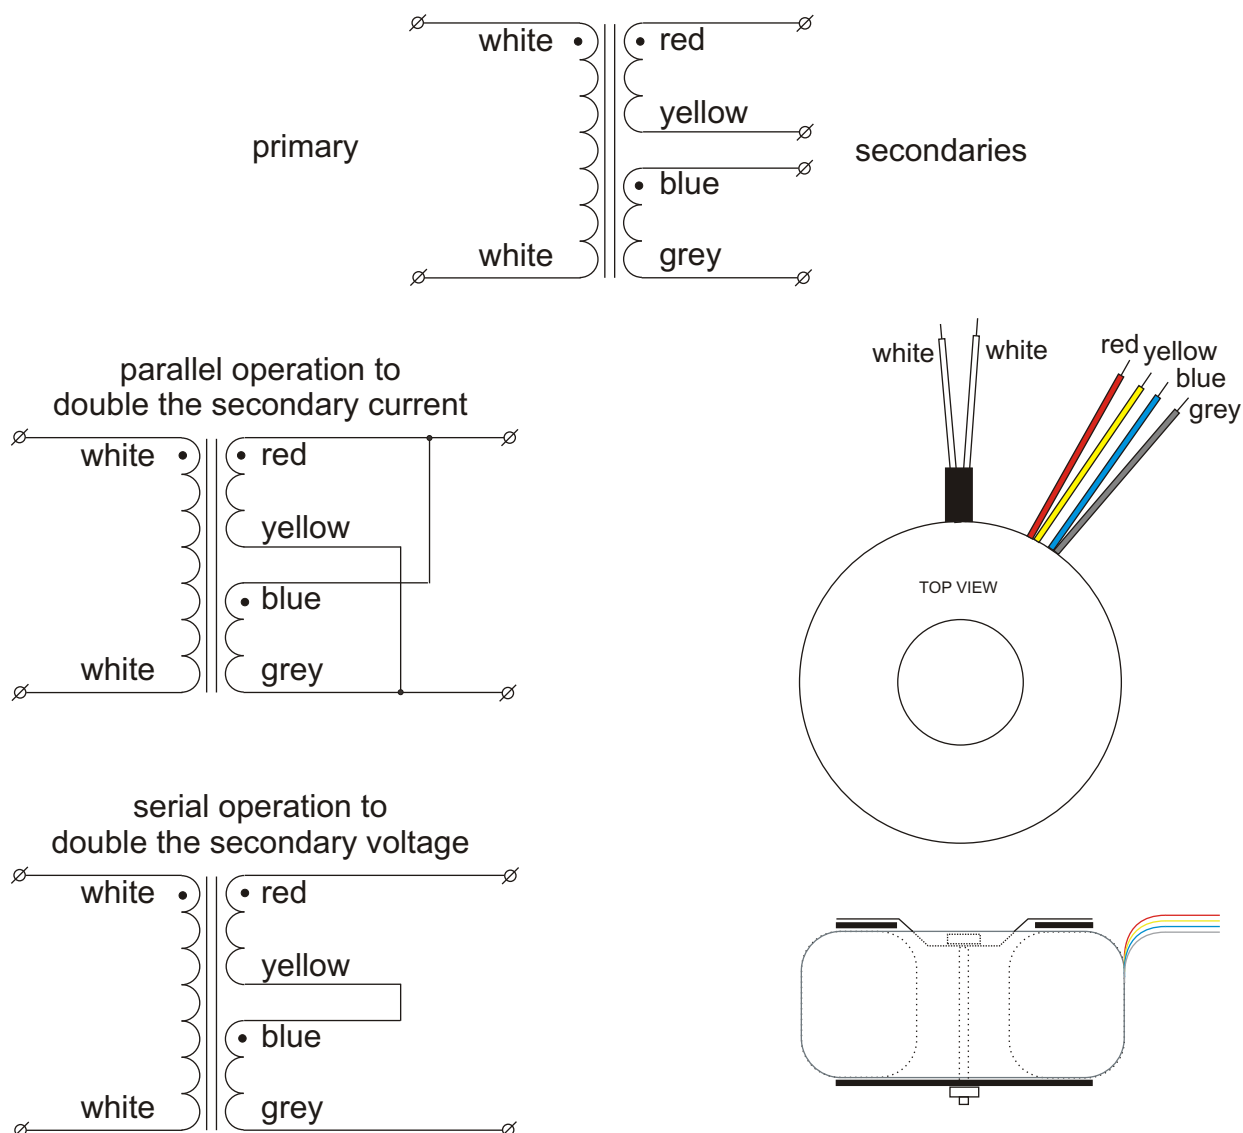

Diameter 91mm
 Height 35mm
 Weight 0.90kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:

- 1 metal washer Ø70mm
- 2 neoprene washers Ø70mm
- 1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E179800.

Time lag fuses to be used.

Primary: 0.4A, 5x20mm, IEC127, high I²t value

Secondary: none

Type number	primary	secondaries	
		voltage	current
38010	230V	2x 6V	6.67A
38011	230V	2x 9V	4.44A
38012	230V	2x 12V	3.33A
38013	230V	2x 15V	2.66A
38014	230V	2x 18V	2.22A
38015	230V	2x 22V	1.81A
38016	230V	2x 25V	1.60A
38017	230V	2x 30V	1.33A

All voltages are under full ohmic load.
 Regulation : 10%



Vossenbrinkweg 1
 NL-7491DA DELDEN
 The Netherlands

P O - B o x 2 4
 NL-7490AA DELDEN
 The Netherlands
 Tel.+31 (0)74 376 3765
 Fax+31 (0)74 376 3132

info@amplimo.nl
 http://www.amplimo.nl

HB

April 2003

© Copyright Amplimo BV

380xx

toroidal transformer range 80VA