


POWER AMPLIFIER APPLICATIONS.

FEATURES:

- . Complementary to 2SA1302
- . Recommend for 100W High Fidelity Audio Frequency Amplifier Output Stage.

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$)

| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|--|-----------|-----------|--------------------|
| Collector-Base Voltage | V_{CBO} | 200 | V |
| Collector-Emitter Voltage | V_{CEO} | 200 | V |
| Emitter-Base Voltage | V_{EBO} | 5 | V |
| Collector Current | I_C | 15 | A |
| Base Current | I_B | 1.5 | A |
| Collector Power Dissipation ($T_c=25^{\circ}\text{C}$) | P_C | 150 | W |
| Junction Temperature | T_j | 150 | $^{\circ}\text{C}$ |
| Storage Temperature Range | T_{stg} | -55 ~ 150 | $^{\circ}\text{C}$ |

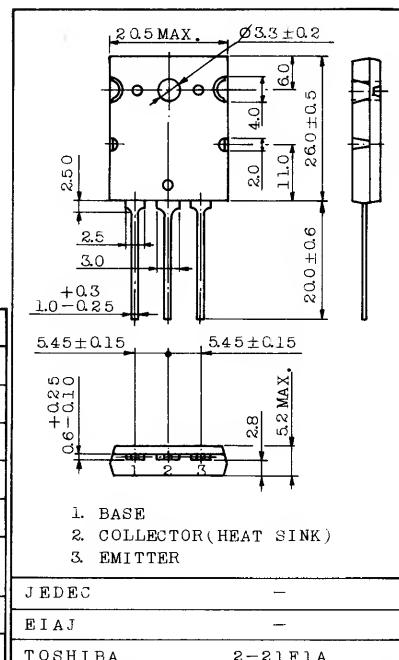

Weight : 9.75g

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$)

| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|--------------------------------------|-----------------------|---|------|------|------|---------------|
| Collector Cut-off Current | I_{CBO} | $V_{CB}=200\text{V}$, $I_E=0$ | - | - | 5.0 | μA |
| Emitter Cut-off Current | I_{EBO} | $V_{EB}=5\text{V}$, $I_C=0$ | - | - | 5.0 | μA |
| Collector-Emitter Breakdown Voltage | $V_{(\text{BR})CEO}$ | $I_C=50\text{mA}$, $I_B=0$ | 200 | - | - | V |
| DC Current Gain | $h_{FE}(1)$ (Note) | $V_{CE}=5\text{V}$, $I_C=1\text{A}$ | 55 | - | 160 | - |
| | $h_{FE}(2)$ | $V_{CE}=5\text{V}$, $I_C=8\text{A}$ | 35 | 60 | - | |
| Collector Emitter Saturation Voltage | $V_{CE(\text{sat})}$ | $I_C=10\text{A}$, $I_B=1\text{A}$ | - | 0.40 | 3.0 | V |
| Base-Emitter Voltage | V_{BE} | $V_{CE}=5\text{V}$, $I_C=8\text{A}$ | - | 1.0 | 1.5 | V |
| Transition Frequency | f_T | $V_{CE}=5\text{V}$, $I_C=1\text{A}$ | - | 30 | - | MHz |
| Collector Output Capacitance | C_{ob} | $V_{CB}=10\text{V}$, $I_E=0$, $f=1\text{MHz}$ | - | 270 | - | pF |

Note : $h_{FE}(1)$ Classification R : 55 ~ 110, O : 80 ~ 160

